

GENIE GR-20 RUNABOUT




MEASUREMENTS		METRIC	IMPERIAL
Working height maximum*		7.90 m	26 ft
Platform height maximum		6.07 m	19 ft 11 in
Platform dimensions (length x width)			
A x B	Standard	0.89 x 0.75 m	2 ft 11 in x 2 ft 6 in
	Standard with extension	1.40 x 0.75 m	4 ft 7 in x 2 ft 6 in
C	Height - stowed	1.98 m	6 ft 6 in
D	Length - stowed	1.35 m	4 ft 5 in
E	Width	0.80 m	2 ft 7 in
F	Ground clearance - centre	6 cm	2 in

PRODUCTIVITY			
Platform capacity		159 kg	350 lb
Slide-out platform extension deck capacity		113 kg	249 lb
Maximum number of persons - indoor / outdoor use		1 / 0	1 / 0
Maximum wind speed		0 km/h	0 mph
Drive speed - stowed		4.0 km/h	2.4 mph
Drive speed - raised		0.8 km/h	0.49 mph
Gradeability**		30%	16.70°
Inside turning radius		zero	zero
Outside turning radius		1.34 m	4 ft 5 in
Raise / lower speed		24 / 21 sec	24 / 21 sec
Controls		proportional	proportional
Tyres - solid non-marking		25 x 8 x 2.5 cm	10 x 3 x 1 in
Wheel load maximum***		553 kg	1,219 lb
Tyre contact pressure***		13 kg/cm ² (1,293 kPa)	187 psi
Occupied floor pressure***		1,180 kg/m ² (11.57 kPa)	241 psf

POWER			
Power source		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity		8.33 L	2.20 gal lqd

WEIGHT****			
		1,131 kg	2,493 lb

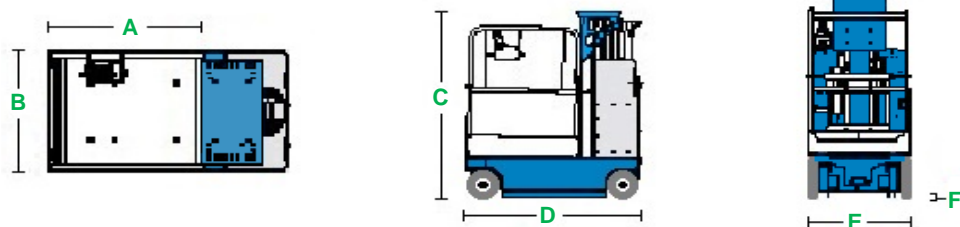

*The metric equivalent of working height adds 2 m to platform height. Imperial adds 6 ft to platform height.

**Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

***Floor loading information is approximate. It should be used only with adequate safety factors.

****Weight will vary depending on options.